

A close-up photograph of a Gühring FT 200 U solid carbide three-fluted drill bit. The bit is positioned vertically, ready to drill into a dark, machined metal workpiece. The background is a blurred industrial setting. A yellow banner at the top contains the Gühring logo.

GÜHRING

***FT 200 U solid carbide
three-fluted cutter***

High feed drilling for reduced cycle times



FT 200 U

Maximum feed rates & top quality drilling results


High feed drill
for reduced cycle times.

The 3-fluted FT 200 U solid carbide drill enables cost-efficient drilling up to and including 12xD without a prior piloting process.

Thanks to its pyramid tip properties combined with the in-house designed web thinning, it is able to achieve precise self centering and perfect material penetration. Thanks to the specially developed Spiropoint grind, the point angle is shaped like a funnel and enables high-precision spot drilling. The FT 200 U is able to achieve optimal chips with its modified flute profile that curls chips tightly and breaks them reliably. In combination with a sickle-shaped cutting edge, the hardening in the edge area and the material stress is significantly reduced.

- x **Tool life** increased by more than 20 %
- x **efficient drilling** up to 12xD, without piloting

- X** Precise self-centring thanks to innovative tip geometry
- X** Maximum possible hole quality on the component with simultaneously high tool lives
- X** Cost-efficient machining thanks to high cutting data

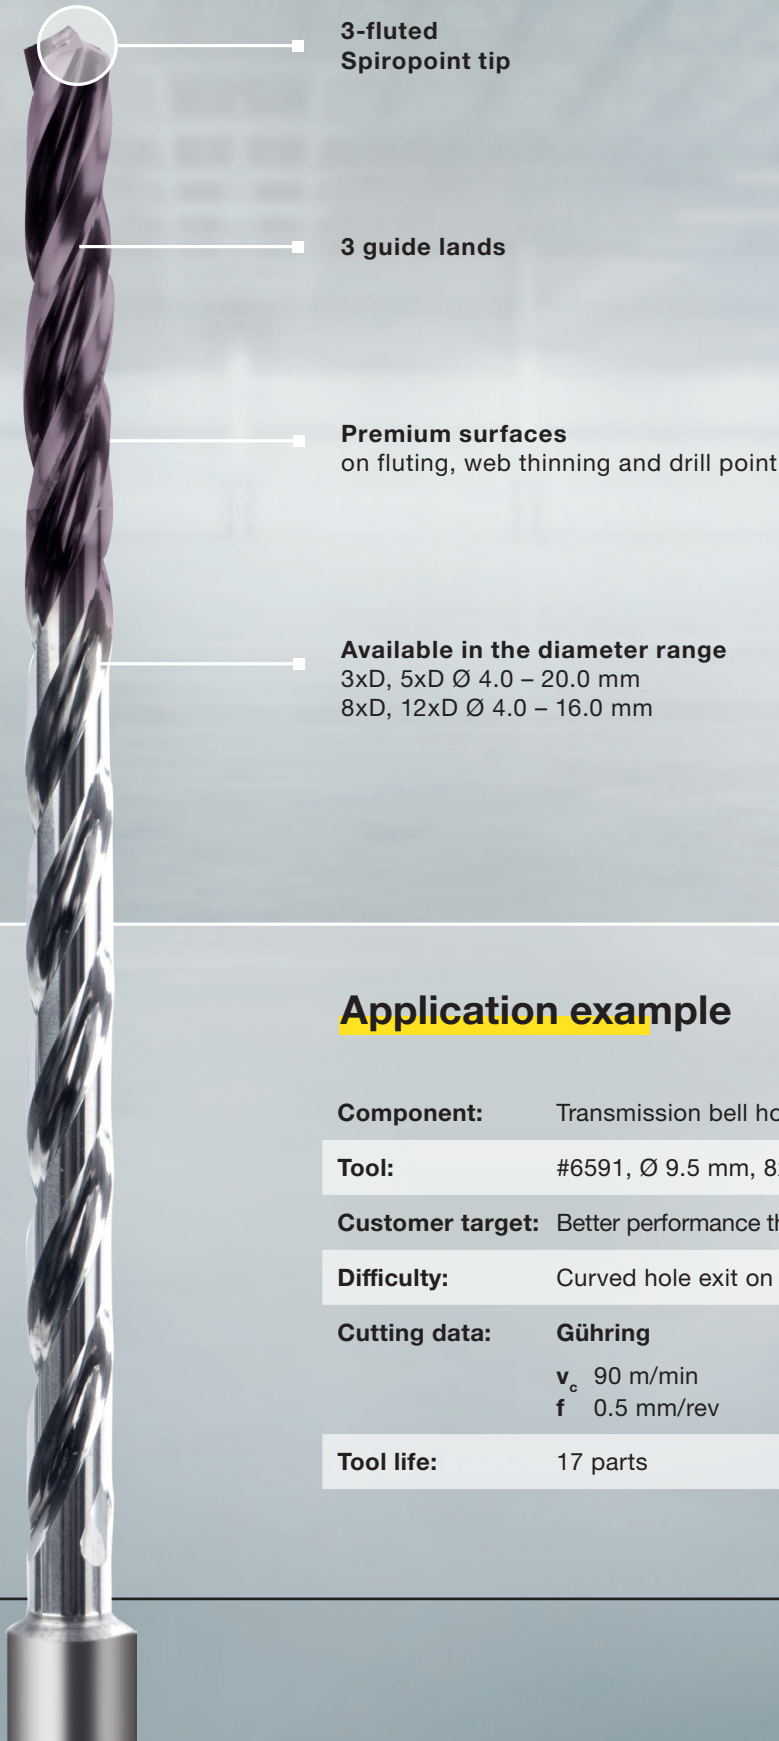

Application example

Component: Transmission bell housing (truck), steel S355 J2G4

Tool: #6591, Ø 9.5 mm, 8xD

Customer target: Better performance than competitor's 3-fluted tool

Difficulty: Curved hole exit on component

Cutting data:	Gühring	Competition
v_c	90 m/min	90 m/min
f	0.5 mm/rev	0.5 mm/rev

Tool life:	Gühring	Competition
	17 parts	14 parts



Ratio drills with coolant ducts, 3-fluted, 3xD

Article no. **6589**




Cutting data page 10



spiropoint grind • optimal centering • suitable for interrupted cutting • maximum performance

P	M	K	N	S	H
●	○	●	○	○	○

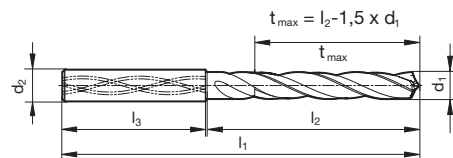

Article no.

6589

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
4.000		6.0	66.0	24.0	36.0	6589 4.000
4.040		6.0	66.0	24.0	36.0	6589 4.040
4.100		6.0	66.0	24.0	36.0	6589 4.100
4.200		6.0	66.0	24.0	36.0	6589 4.200
4.300		6.0	66.0	24.0	36.0	6589 4.300
4.370	11/64	6.0	66.0	24.0	36.0	6589 4.370
4.400		6.0	66.0	24.0	36.0	6589 4.400
4.500		6.0	66.0	24.0	36.0	6589 4.500
4.600		6.0	66.0	24.0	36.0	6589 4.600
4.650		6.0	66.0	24.0	36.0	6589 4.650
4.700		6.0	66.0	24.0	36.0	6589 4.700
4.760	3/16	6.0	66.0	28.0	36.0	6589 4.760
4.800		6.0	66.0	28.0	36.0	6589 4.800
4.900		6.0	66.0	28.0	36.0	6589 4.900
5.000		6.0	66.0	28.0	36.0	6589 5.000
5.100		6.0	66.0	28.0	36.0	6589 5.100
5.110		6.0	66.0	28.0	36.0	6589 5.110
5.160	13/64	6.0	66.0	28.0	36.0	6589 5.160
5.200		6.0	66.0	28.0	36.0	6589 5.200
5.300		6.0	66.0	28.0	36.0	6589 5.300
5.400		6.0	66.0	28.0	36.0	6589 5.400
5.410		6.0	66.0	28.0	36.0	6589 5.410
5.500		6.0	66.0	28.0	36.0	6589 5.500
5.550		6.0	66.0	28.0	36.0	6589 5.550
5.560	7/32	6.0	66.0	28.0	36.0	6589 5.560
5.600		6.0	66.0	28.0	36.0	6589 5.600
5.700		6.0	66.0	28.0	36.0	6589 5.700
5.800		6.0	66.0	28.0	36.0	6589 5.800
5.900		6.0	66.0	28.0	36.0	6589 5.900
5.950	15/64	6.0	66.0	28.0	36.0	6589 5.950
6.000		6.0	66.0	28.0	36.0	6589 6.000
6.100		8.0	79.0	34.0	36.0	6589 6.100
6.200		8.0	79.0	34.0	36.0	6589 6.200
6.300		8.0	79.0	34.0	36.0	6589 6.300
6.350	1/4	8.0	79.0	34.0	36.0	6589 6.350
6.400		8.0	79.0	34.0	36.0	6589 6.400
6.500		8.0	79.0	34.0	36.0	6589 6.500
6.530		8.0	79.0	34.0	36.0	6589 6.530
6.550		8.0	79.0	34.0	36.0	6589 6.550
6.600		8.0	79.0	34.0	36.0	6589 6.600
6.700		8.0	79.0	34.0	36.0	6589 6.700
6.750	17/64	8.0	79.0	34.0	36.0	6589 6.750
6.800		8.0	79.0	34.0	36.0	6589 6.800
6.900		8.0	79.0	34.0	36.0	6589 6.900
7.000		8.0	79.0	34.0	36.0	6589 7.000
7.100		8.0	79.0	41.0	36.0	6589 7.100
7.140	9/32	8.0	79.0	41.0	36.0	6589 7.140
7.200		8.0	79.0	41.0	36.0	6589 7.200
7.300		8.0	79.0	41.0	36.0	6589 7.300
7.400		8.0	79.0	41.0	36.0	6589 7.400
7.500		8.0	79.0	41.0	36.0	6589 7.500
7.540	19/64	8.0	79.0	41.0	36.0	6589 7.540
7.550		8.0	79.0	41.0	36.0	6589 7.550
7.600		8.0	79.0	41.0	36.0	6589 7.600
7.650		8.0	79.0	41.0	36.0	6589 7.650
7.700		8.0	79.0	41.0	36.0	6589 7.700
7.800		8.0	79.0	41.0	36.0	6589 7.800
7.900		8.0	79.0	41.0	36.0	6589 7.900
7.940	5/16	8.0	79.0	41.0	36.0	6589 7.940
8.000		8.0	79.0	41.0	36.0	6589 8.000
8.100		10.0	89.0	47.0	40.0	6589 8.100
8.200		10.0	89.0	47.0	40.0	6589 8.200
8.300		10.0	89.0	47.0	40.0	6589 8.300
8.330	21/64	10.0	89.0	47.0	40.0	6589 8.330
8.400		10.0	89.0	47.0	40.0	6589 8.400
8.500		10.0	89.0	47.0	40.0	6589 8.500

Article no.

6589

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
8.600		10.0	89.0	47.0	40.0	6589 8.600
8.700		10.0	89.0	47.0	40.0	6589 8.700
8.730	11/32	10.0	89.0	47.0	40.0	6589 8.730
8.800		10.0	89.0	47.0	40.0	6589 8.800
8.900		10.0	89.0	47.0	40.0	6589 8.900
9.000		10.0	89.0	47.0	40.0	6589 9.000
9.100		10.0	89.0	47.0	40.0	6589 9.100
9.130	23/64	10.0	89.0	47.0	40.0	6589 9.130
9.200		10.0	89.0	47.0	40.0	6589 9.200
9.250		10.0	89.0	47.0	40.0	6589 9.250
9.300		10.0	89.0	47.0	40.0	6589 9.300
9.340		10.0	89.0	47.0	40.0	6589 9.340
9.400		10.0	89.0	47.0	40.0	6589 9.400
9.500		10.0	89.0	47.0	40.0	6589 9.500
9.520	3/8	10.0	89.0	47.0	40.0	6589 9.520
9.550		10.0	89.0	47.0	40.0	6589 9.550
9.600		10.0	89.0	47.0	40.0	6589 9.600
9.700		10.0	89.0	47.0	40.0	6589 9.700
9.800		10.0	89.0	47.0	40.0	6589 9.800
9.900		10.0	89.0	47.0	40.0	6589 9.900
9.920	25/64	10.0	89.0	47.0	40.0	6589 9.920
10.000		10.0	89.0	47.0	40.0	6589 10.000
10.100		12.0	102.0	55.0	45.0	6589 10.100
10.200		12.0	102.0	55.0	45.0	6589 10.200
10.300		12.0	102.0	55.0	45.0	6589 10.300
10.320	13/32	12.0	102.0	55.0	45.0	6589 10.320
10.400		12.0	102.0	55.0	45.0	6589 10.400
10.500		12.0	102.0	55.0	45.0	6589 10.500
10.600		12.0	102.0	55.0	45.0	6589 10.600
10.700		12.0	102.0	55.0	45.0	6589 10.700
10.720	27/64	12.0	102.0	55.0	45.0	6589 10.720
10.800		12.0	102.0	55.0	45.0	6589 10.800
10.900		12.0	102.0	55.0	45.0	6589 10.900
11.000		12.0	102.0	55.0	45.0	6589 11.000
11.100		12.0	102.0	55.0	45.0	6589 11.100
11.110	7/16	12.0	102.0	55.0	45.0	6589 11.110
11.200		12.0	102.0	55.0	45.0	6589 11.200
11.300		12.0	102.0	55.0	45.0	6589 11.300
11.400		12.0	102.0	55.0	45.0	6589 11.400
11.500		12.0	102.0	55.0	45.0	6589 11.500
11.510	29/64	12.0	102.0	55.0	45.0	6589 11.510
11.550		12.0	102.0	55.0	45.0	6589 11.550
11.600		12.0	102.0	55.0	45.0	6589 11.600
11.700		12.0	102.0	55.0	45.0	6589 11.700
11.800		12.0	102.0	55.0	45.0	6589 11.800
11.900		12.0	102.0	55.0	45.0	6589 11.900
11.910	15/32	12.0	102.0	55.0	45.0	6589 11.910
12.000		12.0	102.0	55.0	45.0	6589 12.000
12.100		14.0	107.0	60.0	45.0	6589 12.100
12.200		14.0	107.0	60.0	45.0	6589 12.200
12.300	31/64	14.0	107.0	60.0	45.0	6589 12.300
12.400		14.0	107.0	60.0	45.0	6589 12.400
12.500		14.0	107.0	60.0	45.0	6589 12.500
12.600		14.0	107.0	60.0	45.0	6589 12.600
12.700	1/2	14.0	107.0	60.0	45.0	6589 12.700
12.800		14.0	107.0	60.0	45.0	6589 12.800
12.900		14.0	107.0	60.0	45.0	6589 12.900
13.000		14.0	107.0	60.0	45.0	6589 13.000
13.100	33/64	14.0	107.0	60.0	45.0	6589 13.100
13.200		14.0	107.0	60.0	45.0	6589 13.200
13.300		14.0	107.0	60.0	45.0	6589 13.300
13.400		14.0	107.0	60.0	45.0	6589 13.400
13.490	17/32	14.0	107.0	60.0	45.0	6589 13.490
13.500		14.0	107.0	60.0	45.0	6589 13.500
13.600		14.0	107.0	60.0	45.0	6589 13.600
13.700		14.0	107.0	60.0	45.0	6589 13.700



Article no. 6589							Article no. 6589						
d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.	d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
13.800	35/64	14.0	107.0	60.0	45.0	6589 13.800	16.270	41/64	18.0	123.0	73.0	48.0	6589 16.270
13.890		14.0	107.0	60.0	45.0	6589 13.890	16.300		18.0	123.0	73.0	48.0	6589 16.300
13.900		14.0	107.0	60.0	45.0	6589 13.900	16.500		18.0	123.0	73.0	48.0	6589 16.500
14.000	9/16	14.0	107.0	60.0	45.0	6589 14.000	16.670	21/32	18.0	123.0	73.0	48.0	6589 16.670
14.100		16.0	115.0	65.0	48.0	6589 14.100	16.700		18.0	123.0	73.0	48.0	6589 16.700
14.200		16.0	115.0	65.0	48.0	6589 14.200	16.900		18.0	123.0	73.0	48.0	6589 16.900
14.290	37/64	16.0	115.0	65.0	48.0	6589 14.290	17.000	43/64	18.0	123.0	73.0	48.0	6589 17.000
14.300		16.0	115.0	65.0	48.0	6589 14.300	17.070	11/16	18.0	123.0	73.0	48.0	6589 17.070
14.400		16.0	115.0	65.0	48.0	6589 14.400	17.460		18.0	123.0	73.0	48.0	6589 17.460
14.500	19/32	16.0	115.0	65.0	48.0	6589 14.500	17.500		18.0	123.0	73.0	48.0	6589 17.500
14.600		16.0	115.0	65.0	48.0	6589 14.600	17.550		18.0	123.0	73.0	48.0	6589 17.550
14.680		16.0	115.0	65.0	48.0	6589 14.680	17.700		18.0	123.0	73.0	48.0	6589 17.700
14.700	39/64	16.0	115.0	65.0	48.0	6589 14.700	17.860	45/64	18.0	123.0	73.0	48.0	6589 17.860
14.800		16.0	115.0	65.0	48.0	6589 14.800	18.000		18.0	123.0	73.0	48.0	6589 18.000
14.900		16.0	115.0	65.0	48.0	6589 14.900	18.260	23/32	20.0	131.0	79.0	50.0	6589 18.260
15.000	5/8	16.0	115.0	65.0	48.0	6589 15.000	18.500		20.0	131.0	79.0	50.0	6589 18.500
15.080		16.0	115.0	65.0	48.0	6589 15.080	18.700		20.0	131.0	79.0	50.0	6589 18.700
15.100		16.0	115.0	65.0	48.0	6589 15.100	18.900		20.0	131.0	79.0	50.0	6589 18.900
15.200	19/32	16.0	115.0	65.0	48.0	6589 15.200	19.000	3/4	20.0	131.0	79.0	50.0	6589 19.000
15.300		16.0	115.0	65.0	48.0	6589 15.300	19.050		20.0	131.0	79.0	50.0	6589 19.050
15.400		16.0	115.0	65.0	48.0	6589 15.400	19.250		20.0	131.0	79.0	50.0	6589 19.250
15.480	5/8	16.0	115.0	65.0	48.0	6589 15.480	19.300		20.0	131.0	79.0	50.0	6589 19.300
15.500		16.0	115.0	65.0	48.0	6589 15.500	19.450	49/64	20.0	131.0	79.0	50.0	6589 19.450
15.550		16.0	115.0	65.0	48.0	6589 15.550	19.500		20.0	131.0	79.0	50.0	6589 19.500
15.600	5/8	16.0	115.0	65.0	48.0	6589 15.600	19.550		20.0	131.0	79.0	50.0	6589 19.550
15.700		16.0	115.0	65.0	48.0	6589 15.700	19.700		20.0	131.0	79.0	50.0	6589 19.700
15.800		16.0	115.0	65.0	48.0	6589 15.800	19.800		20.0	131.0	79.0	50.0	6589 19.800
15.870	5/8	16.0	115.0	65.0	48.0	6589 15.870	19.840	25/32	20.0	131.0	79.0	50.0	6589 19.840
15.900		16.0	115.0	65.0	48.0	6589 15.900	20.000		20.0	131.0	79.0	50.0	6589 20.000
16.000		16.0	115.0	65.0	48.0	6589 16.000							



Ratio drills with coolant ducts, 3-fluted, 5xD

Article no. **6590**




Cutting data page 10



spiropoint grind • optimal centering • suitable for interrupted cutting • maximum performance

P	M	K	N	S	H
●	○	●	○	○	○

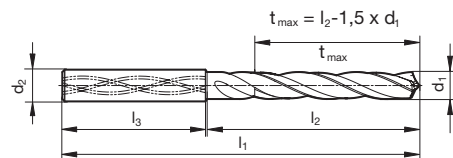

Article no.

6590

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
4.000		6.0	74.0	36.0	36.0	6590 4.000
4.040		6.0	74.0	36.0	36.0	6590 4.040
4.100		6.0	74.0	36.0	36.0	6590 4.100
4.200		6.0	74.0	36.0	36.0	6590 4.200
4.300		6.0	74.0	36.0	36.0	6590 4.300
4.370	11/64	6.0	74.0	36.0	36.0	6590 4.370
4.400		6.0	74.0	36.0	36.0	6590 4.400
4.500		6.0	74.0	36.0	36.0	6590 4.500
4.600		6.0	74.0	36.0	36.0	6590 4.600
4.650		6.0	74.0	36.0	36.0	6590 4.650
4.700		6.0	74.0	36.0	36.0	6590 4.700
4.760	3/16	6.0	82.0	44.0	36.0	6590 4.760
4.800		6.0	82.0	44.0	36.0	6590 4.800
4.900		6.0	82.0	44.0	36.0	6590 4.900
5.000		6.0	82.0	44.0	36.0	6590 5.000
5.100		6.0	82.0	44.0	36.0	6590 5.100
5.110		6.0	82.0	44.0	36.0	6590 5.110
5.160	13/64	6.0	82.0	44.0	36.0	6590 5.160
5.200		6.0	82.0	44.0	36.0	6590 5.200
5.300		6.0	82.0	44.0	36.0	6590 5.300
5.400		6.0	82.0	44.0	36.0	6590 5.400
5.410		6.0	82.0	44.0	36.0	6590 5.410
5.500		6.0	82.0	44.0	36.0	6590 5.500
5.550		6.0	82.0	44.0	36.0	6590 5.550
5.560	7/32	6.0	82.0	44.0	36.0	6590 5.560
5.600		6.0	82.0	44.0	36.0	6590 5.600
5.700		6.0	82.0	44.0	36.0	6590 5.700
5.800		6.0	82.0	44.0	36.0	6590 5.800
5.900		6.0	82.0	44.0	36.0	6590 5.900
5.950	15/64	6.0	82.0	44.0	36.0	6590 5.950
6.000		6.0	82.0	44.0	36.0	6590 6.000
6.100		8.0	91.0	53.0	36.0	6590 6.100
6.200		8.0	91.0	53.0	36.0	6590 6.200
6.300		8.0	91.0	53.0	36.0	6590 6.300
6.350	1/4	8.0	91.0	53.0	36.0	6590 6.350
6.400		8.0	91.0	53.0	36.0	6590 6.400
6.500		8.0	91.0	53.0	36.0	6590 6.500
6.530		8.0	91.0	53.0	36.0	6590 6.530
6.550		8.0	91.0	53.0	36.0	6590 6.550
6.600		8.0	91.0	53.0	36.0	6590 6.600
6.700		8.0	91.0	53.0	36.0	6590 6.700
6.750	17/64	8.0	91.0	53.0	36.0	6590 6.750
6.800		8.0	91.0	53.0	36.0	6590 6.800
6.900		8.0	91.0	53.0	36.0	6590 6.900
7.000		8.0	91.0	53.0	36.0	6590 7.000
7.100		8.0	91.0	53.0	36.0	6590 7.100
7.140	9/32	8.0	91.0	53.0	36.0	6590 7.140
7.200		8.0	91.0	53.0	36.0	6590 7.200
7.300		8.0	91.0	53.0	36.0	6590 7.300
7.400		8.0	91.0	53.0	36.0	6590 7.400
7.500		8.0	91.0	53.0	36.0	6590 7.500
7.540	19/64	8.0	91.0	53.0	36.0	6590 7.540
7.550		8.0	91.0	53.0	36.0	6590 7.550
7.600		8.0	91.0	53.0	36.0	6590 7.600
7.650		8.0	91.0	53.0	36.0	6590 7.650
7.700		8.0	91.0	53.0	36.0	6590 7.700
7.800		8.0	91.0	53.0	36.0	6590 7.800
7.900		8.0	91.0	53.0	36.0	6590 7.900
7.940	5/16	8.0	91.0	53.0	36.0	6590 7.940
8.000		8.0	91.0	53.0	36.0	6590 8.000
8.100		10.0	103.0	61.0	40.0	6590 8.100
8.200		10.0	103.0	61.0	40.0	6590 8.200
8.300		10.0	103.0	61.0	40.0	6590 8.300
8.330	21/64	10.0	103.0	61.0	40.0	6590 8.330
8.400		10.0	103.0	61.0	40.0	6590 8.400
8.500		10.0	103.0	61.0	40.0	6590 8.500

Article no.

6590

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
8.600		10.0	103.0	61.0	40.0	6590 8.600
8.700		10.0	103.0	61.0	40.0	6590 8.700
8.730	11/32	10.0	103.0	61.0	40.0	6590 8.730
8.800		10.0	103.0	61.0	40.0	6590 8.800
8.900		10.0	103.0	61.0	40.0	6590 8.900
9.000		10.0	103.0	61.0	40.0	6590 9.000
9.100		10.0	103.0	61.0	40.0	6590 9.100
9.130	23/64	10.0	103.0	61.0	40.0	6590 9.130
9.200		10.0	103.0	61.0	40.0	6590 9.200
9.250		10.0	103.0	61.0	40.0	6590 9.250
9.300		10.0	103.0	61.0	40.0	6590 9.300
9.340		10.0	103.0	61.0	40.0	6590 9.340
9.400		10.0	103.0	61.0	40.0	6590 9.400
9.500		10.0	103.0	61.0	40.0	6590 9.500
9.520	3/8	10.0	103.0	61.0	40.0	6590 9.520
9.550		10.0	103.0	61.0	40.0	6590 9.550
9.600		10.0	103.0	61.0	40.0	6590 9.600
9.700		10.0	103.0	61.0	40.0	6590 9.700
9.800		10.0	103.0	61.0	40.0	6590 9.800
9.900		10.0	103.0	61.0	40.0	6590 9.900
9.920	25/64	10.0	103.0	61.0	40.0	6590 9.920
10.000		10.0	103.0	61.0	40.0	6590 10.000
10.100		12.0	118.0	71.0	45.0	6590 10.100
10.200		12.0	118.0	71.0	45.0	6590 10.200
10.300		12.0	118.0	71.0	45.0	6590 10.300
10.320	13/32	12.0	118.0	71.0	45.0	6590 10.320
10.400		12.0	118.0	71.0	45.0	6590 10.400
10.500		12.0	118.0	71.0	45.0	6590 10.500
10.600		12.0	118.0	71.0	45.0	6590 10.600
10.700		12.0	118.0	71.0	45.0	6590 10.700
10.720	27/64	12.0	118.0	71.0	45.0	6590 10.720
10.800		12.0	118.0	71.0	45.0	6590 10.800
10.900		12.0	118.0	71.0	45.0	6590 10.900
11.000		12.0	118.0	71.0	45.0	6590 11.000
11.100		12.0	118.0	71.0	45.0	6590 11.100
11.110	7/16	12.0	118.0	71.0	45.0	6590 11.110
11.200		12.0	118.0	71.0	45.0	6590 11.200
11.300		12.0	118.0	71.0	45.0	6590 11.300
11.400		12.0	118.0	71.0	45.0	6590 11.400
11.500		12.0	118.0	71.0	45.0	6590 11.500
11.510	29/64	12.0	118.0	71.0	45.0	6590 11.510
11.550		12.0	118.0	71.0	45.0	6590 11.550
11.600		12.0	118.0	71.0	45.0	6590 11.600
11.700		12.0	118.0	71.0	45.0	6590 11.700
11.800		12.0	118.0	71.0	45.0	6590 11.800
11.900		12.0	118.0	71.0	45.0	6590 11.900
11.910	15/32	12.0	118.0	71.0	45.0	6590 11.910
12.000		12.0	118.0	71.0	45.0	6590 12.000
12.100		14.0	124.0	77.0	45.0	6590 12.100
12.200		14.0	124.0	77.0	45.0	6590 12.200
12.300	31/64	14.0	124.0	77.0	45.0	6590 12.300
12.400		14.0	124.0	77.0	45.0	6590 12.400
12.500		14.0	124.0	77.0	45.0	6590 12.500
12.600		14.0	124.0	77.0	45.0	6590 12.600
12.700	1/2	14.0	124.0	77.0	45.0	6590 12.700
12.800		14.0	124.0	77.0	45.0	6590 12.800
12.900		14.0	124.0	77.0	45.0	6590 12.900
13.000		14.0	124.0	77.0	45.0	6590 13.000
13.100	33/64	14.0	124.0	77.0	45.0	6590 13.100
13.200		14.0	124.0	77.0	45.0	6590 13.200
13.300		14.0	124.0	77.0	45.0	6590 13.300
13.400		14.0	124.0	77.0	45.0	6590 13.400
13.490	17/32	14.0	124.0	77.0	45.0	6590 13.490
13.500		14.0	124.0	77.0	45.0	6590 13.500
13.600		14.0	124.0	77.0	45.0	6590 13.600
13.700		14.0	124.0	77.0	45.0	6590 13.700




Article no.						6590	Article no.						6590
d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.	d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
13.800	35/64	14.0	124.0	77.0	45.0	6590 13.800	16.270	41/64	18.0	143.0	93.0	48.0	6590 16.270
13.890		14.0	124.0	77.0	45.0	6590 13.890	16.300	21/32	18.0	143.0	93.0	48.0	6590 16.300
13.900		14.0	124.0	77.0	45.0	6590 13.900	16.500		18.0	143.0	93.0	48.0	6590 16.500
14.000	9/16	14.0	124.0	77.0	45.0	6590 14.000	16.670		18.0	143.0	93.0	48.0	6590 16.670
14.100		16.0	133.0	83.0	48.0	6590 14.100	16.700	43/64	18.0	143.0	93.0	48.0	6590 16.700
14.200		16.0	133.0	83.0	48.0	6590 14.200	16.900		18.0	143.0	93.0	48.0	6590 16.900
14.290	37/64	16.0	133.0	83.0	48.0	6590 14.290	17.000		18.0	143.0	93.0	48.0	6590 17.000
14.300		16.0	133.0	83.0	48.0	6590 14.300	17.070	11/16	18.0	143.0	93.0	48.0	6590 17.070
14.400		16.0	133.0	83.0	48.0	6590 14.400	17.460		18.0	143.0	93.0	48.0	6590 17.460
14.500	19/32	16.0	133.0	83.0	48.0	6590 14.500	17.500		18.0	143.0	93.0	48.0	6590 17.500
14.600		16.0	133.0	83.0	48.0	6590 14.600	17.550	45/64	18.0	143.0	93.0	48.0	6590 17.550
14.680		16.0	133.0	83.0	48.0	6590 14.680	17.700		18.0	143.0	93.0	48.0	6590 17.700
14.700	39/64	16.0	133.0	83.0	48.0	6590 14.700	17.860		18.0	143.0	93.0	48.0	6590 17.860
14.800		16.0	133.0	83.0	48.0	6590 14.800	18.000	23/32	18.0	143.0	93.0	48.0	6590 18.000
14.900		16.0	133.0	83.0	48.0	6590 14.900	18.260		20.0	153.0	101.0	50.0	6590 18.260
15.000	5/8	16.0	133.0	83.0	48.0	6590 15.000	18.500		20.0	153.0	101.0	50.0	6590 18.500
15.080		16.0	133.0	83.0	48.0	6590 15.080	18.700	3/4	20.0	153.0	101.0	50.0	6590 18.700
15.100		16.0	133.0	83.0	48.0	6590 15.100	18.900		20.0	153.0	101.0	50.0	6590 18.900
15.200	19/16	16.0	133.0	83.0	48.0	6590 15.200	19.000		20.0	153.0	101.0	50.0	6590 19.000
15.300		16.0	133.0	83.0	48.0	6590 15.300	19.050	49/64	20.0	153.0	101.0	50.0	6590 19.050
15.400		16.0	133.0	83.0	48.0	6590 15.400	19.250		20.0	153.0	101.0	50.0	6590 19.250
15.480	25/32	16.0	133.0	83.0	48.0	6590 15.480	19.300		20.0	153.0	101.0	50.0	6590 19.300
15.500		16.0	133.0	83.0	48.0	6590 15.500	19.450	1 1/8	20.0	153.0	101.0	50.0	6590 19.450
15.550		16.0	133.0	83.0	48.0	6590 15.550	19.500		20.0	153.0	101.0	50.0	6590 19.500
15.600	1 1/4	16.0	133.0	83.0	48.0	6590 15.600	19.550		20.0	153.0	101.0	50.0	6590 19.550
15.700		16.0	133.0	83.0	48.0	6590 15.700	19.700	1 1/2	20.0	153.0	101.0	50.0	6590 19.700
15.800		16.0	133.0	83.0	48.0	6590 15.800	19.800		20.0	153.0	101.0	50.0	6590 19.800
15.870	1 3/8	16.0	133.0	83.0	48.0	6590 15.870	19.840		20.0	153.0	101.0	50.0	6590 19.840
15.900		16.0	133.0	83.0	48.0	6590 15.900	20.000	1 7/8	20.0	153.0	101.0	50.0	6590 20.000
16.000		16.0	133.0	83.0	48.0	6590 16.000							




Ratio drills with coolant ducts, 3-fluted, 8xD

Article no. **6591**

Cutting data page 11



spiropoint grind • optimal centering • drilling without piloting • suitable for interrupted cutting • maximum performance

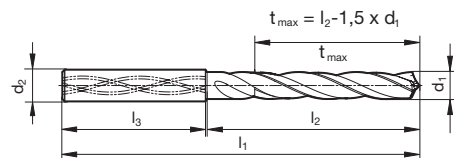

Article no.

6591

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
4.000		6.0	91.0	51.0	36.0	6591 4.000
4.040		6.0	91.0	51.0	36.0	6591 4.040
4.100		6.0	91.0	51.0	36.0	6591 4.100
4.200		6.0	91.0	51.0	36.0	6591 4.200
4.300		6.0	91.0	51.0	36.0	6591 4.300
4.370	11/64	6.0	91.0	51.0	36.0	6591 4.370
4.400		6.0	91.0	51.0	36.0	6591 4.400
4.500		6.0	91.0	51.0	36.0	6591 4.500
4.600		6.0	96.0	56.0	36.0	6591 4.600
4.700		6.0	96.0	56.0	36.0	6591 4.700
4.760	3/16	6.0	96.0	56.0	36.0	6591 4.760
4.800		6.0	96.0	56.0	36.0	6591 4.800
4.900		6.0	96.0	56.0	36.0	6591 4.900
5.000		6.0	96.0	56.0	36.0	6591 5.000
5.100		6.0	101.0	61.0	36.0	6591 5.100
5.110		6.0	101.0	61.0	36.0	6591 5.110
5.160	13/64	6.0	101.0	61.0	36.0	6591 5.160
5.200		6.0	101.0	61.0	36.0	6591 5.200
5.300		6.0	101.0	61.0	36.0	6591 5.300
5.400		6.0	101.0	61.0	36.0	6591 5.400
5.410		6.0	101.0	61.0	36.0	6591 5.410
5.500		6.0	101.0	61.0	36.0	6591 5.500
5.560	7/32	6.0	106.0	66.0	36.0	6591 5.560
5.600		6.0	106.0	66.0	36.0	6591 5.600
5.700		6.0	106.0	66.0	36.0	6591 5.700
5.800		6.0	106.0	66.0	36.0	6591 5.800
5.900		6.0	106.0	66.0	36.0	6591 5.900
5.950	15/64	6.0	106.0	66.0	36.0	6591 5.950
6.000		6.0	106.0	66.0	36.0	6591 6.000
6.100		8.0	126.0	86.0	36.0	6591 6.100
6.200		8.0	126.0	86.0	36.0	6591 6.200
6.300		8.0	126.0	86.0	36.0	6591 6.300
6.350	1/4	8.0	126.0	86.0	36.0	6591 6.350
6.400		8.0	126.0	86.0	36.0	6591 6.400
6.500		8.0	126.0	86.0	36.0	6591 6.500
6.530		8.0	126.0	86.0	36.0	6591 6.530
6.600		8.0	126.0	86.0	36.0	6591 6.600
6.700		8.0	126.0	86.0	36.0	6591 6.700
6.750	17/64	8.0	126.0	86.0	36.0	6591 6.750
6.800		8.0	126.0	86.0	36.0	6591 6.800
6.900		8.0	126.0	86.0	36.0	6591 6.900
7.000		8.0	126.0	86.0	36.0	6591 7.000
7.100		8.0	126.0	86.0	36.0	6591 7.100
7.140	9/32	8.0	126.0	86.0	36.0	6591 7.140
7.200		8.0	126.0	86.0	36.0	6591 7.200
7.300		8.0	126.0	86.0	36.0	6591 7.300
7.400		8.0	126.0	86.0	36.0	6591 7.400
7.500		8.0	126.0	86.0	36.0	6591 7.500
7.540	19/64	8.0	126.0	86.0	36.0	6591 7.540
7.600		8.0	126.0	86.0	36.0	6591 7.600
7.700		8.0	126.0	86.0	36.0	6591 7.700
7.800		8.0	126.0	86.0	36.0	6591 7.800
7.900		8.0	126.0	86.0	36.0	6591 7.900
7.940	5/16	8.0	126.0	86.0	36.0	6591 7.940
8.000		8.0	126.0	86.0	36.0	6591 8.000
8.100		10.0	150.0	106.0	40.0	6591 8.100
8.200		10.0	150.0	106.0	40.0	6591 8.200
8.300		10.0	150.0	106.0	40.0	6591 8.300
8.330	21/64	10.0	150.0	106.0	40.0	6591 8.330
8.400		10.0	150.0	106.0	40.0	6591 8.400
8.500		10.0	150.0	106.0	40.0	6591 8.500
8.600		10.0	150.0	106.0	40.0	6591 8.600
8.700		10.0	150.0	106.0	40.0	6591 8.700
8.730	11/32	10.0	150.0	106.0	40.0	6591 8.730
8.800		10.0	150.0	106.0	40.0	6591 8.800
8.900		10.0	150.0	106.0	40.0	6591 8.900

Article no.

6591

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
9.000		10.0	150.0	106.0	40.0	6591 9.000
9.100		10.0	150.0	106.0	40.0	6591 9.100
9.130	23/64	10.0	150.0	106.0	40.0	6591 9.130
9.200		10.0	150.0	106.0	40.0	6591 9.200
9.300		10.0	150.0	106.0	40.0	6591 9.300
9.340		10.0	150.0	106.0	40.0	6591 9.340
9.400		10.0	150.0	106.0	40.0	6591 9.400
9.500		10.0	150.0	106.0	40.0	6591 9.500
9.520	3/8	10.0	150.0	106.0	40.0	6591 9.520
9.600		10.0	150.0	106.0	40.0	6591 9.600
9.700		10.0	150.0	106.0	40.0	6591 9.700
9.800		10.0	150.0	106.0	40.0	6591 9.800
9.900		10.0	150.0	106.0	40.0	6591 9.900
9.920	25/64	10.0	150.0	106.0	40.0	6591 9.920
10.000		10.0	150.0	106.0	40.0	6591 10.000
10.100		12.0	175.0	126.0	45.0	6591 10.100
10.200		12.0	175.0	126.0	45.0	6591 10.200
10.300		12.0	175.0	126.0	45.0	6591 10.300
10.320	13/32	12.0	175.0	126.0	45.0	6591 10.320
10.400		12.0	175.0	126.0	45.0	6591 10.400
10.500		12.0	175.0	126.0	45.0	6591 10.500
10.600		12.0	175.0	126.0	45.0	6591 10.600
10.700		12.0	175.0	126.0	45.0	6591 10.700
10.720	27/64	12.0	175.0	126.0	45.0	6591 10.720
10.800		12.0	175.0	126.0	45.0	6591 10.800
10.900		12.0	175.0	126.0	45.0	6591 10.900
11.000		12.0	175.0	126.0	45.0	6591 11.000
11.100		12.0	175.0	126.0	45.0	6591 11.100
11.110	7/16	12.0	175.0	126.0	45.0	6591 11.110
11.200		12.0	175.0	126.0	45.0	6591 11.200
11.300		12.0	175.0	126.0	45.0	6591 11.300
11.400		12.0	175.0	126.0	45.0	6591 11.400
11.500		12.0	175.0	126.0	45.0	6591 11.500
11.510	29/64	12.0	175.0	126.0	45.0	6591 11.510
11.600		12.0	175.0	126.0	45.0	6591 11.600
11.700		12.0	175.0	126.0	45.0	6591 11.700
11.800		12.0	175.0	126.0	45.0	6591 11.800
11.900		12.0	175.0	126.0	45.0	6591 11.900
11.910	15/32	12.0	175.0	126.0	45.0	6591 11.910
12.000		12.0	175.0	126.0	45.0	6591 12.000
12.300	31/64	14.0	195.0	146.0	45.0	6591 12.300
12.500		14.0	195.0	146.0	45.0	6591 12.500
12.700	1/2	14.0	195.0	146.0	45.0	6591 12.700
13.000		14.0	195.0	146.0	45.0	6591 13.000
13.100	33/64	14.0	195.0	146.0	45.0	6591 13.100
13.490	17/32	14.0	195.0	146.0	45.0	6591 13.490
13.500		14.0	195.0	146.0	45.0	6591 13.500
13.890	35/64	14.0	195.0	146.0	45.0	6591 13.890
14.000		14.0	195.0	146.0	45.0	6591 14.000
14.290	9/16	16.0	218.0	166.0	48.0	6591 14.290
14.500		16.0	218.0	166.0	48.0	6591 14.500
14.680	37/64	16.0	218.0	166.0	48.0	6591 14.680
15.000		16.0	218.0	166.0	48.0	6591 15.000
15.080	19/32	16.0	218.0	166.0	48.0	6591 15.080
15.480	39/64	16.0	218.0	166.0	48.0	6591 15.480
15.500		16.0	218.0	166.0	48.0	6591 15.500
15.870	5/8	16.0	218.0	166.0	48.0	6591 15.870
16.000		16.0	218.0	166.0	48.0	6591 16.000



Ratio drills with coolant ducts, 3-fluted, 12xD


Article no. **6592**

Cutting data page 12



P	M	K	N	S	H
●	○	●	○	○	○

spiropoint grind • optimal centering • drilling without piloting • suitable for interrupted cutting • maximum performance

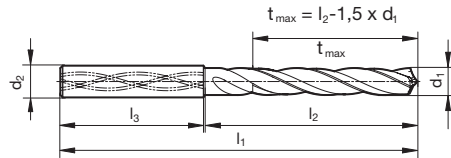

Article no.

6592

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
4.000		6.0	109.0	69.0	36.0	6592 4.000
4.040		6.0	109.0	69.0	36.0	6592 4.040
4.100		6.0	109.0	69.0	36.0	6592 4.100
4.200		6.0	109.0	69.0	36.0	6592 4.200
4.300		6.0	109.0	69.0	36.0	6592 4.300
4.370	11/64	6.0	109.0	69.0	36.0	6592 4.370
4.400		6.0	109.0	69.0	36.0	6592 4.400
4.500		6.0	109.0	69.0	36.0	6592 4.500
4.600		6.0	116.0	76.0	36.0	6592 4.600
4.700		6.0	116.0	76.0	36.0	6592 4.700
4.760	3/16	6.0	116.0	76.0	36.0	6592 4.760
4.800		6.0	116.0	76.0	36.0	6592 4.800
4.900		6.0	116.0	76.0	36.0	6592 4.900
5.000		6.0	116.0	76.0	36.0	6592 5.000
5.100		6.0	123.0	83.0	36.0	6592 5.100
5.110		6.0	123.0	83.0	36.0	6592 5.110
5.160	13/64	6.0	123.0	83.0	36.0	6592 5.160
5.200		6.0	123.0	83.0	36.0	6592 5.200
5.300		6.0	123.0	83.0	36.0	6592 5.300
5.400		6.0	123.0	83.0	36.0	6592 5.400
5.410		6.0	123.0	83.0	36.0	6592 5.410
5.500		6.0	123.0	83.0	36.0	6592 5.500
5.560	7/32	6.0	130.0	90.0	36.0	6592 5.560
5.600		6.0	130.0	90.0	36.0	6592 5.600
5.700		6.0	130.0	90.0	36.0	6592 5.700
5.800		6.0	130.0	90.0	36.0	6592 5.800
5.900		6.0	130.0	90.0	36.0	6592 5.900
5.950	15/64	6.0	130.0	90.0	36.0	6592 5.950
6.000		6.0	130.0	90.0	36.0	6592 6.000
6.100		8.0	158.0	118.0	36.0	6592 6.100
6.200		8.0	158.0	118.0	36.0	6592 6.200
6.300		8.0	158.0	118.0	36.0	6592 6.300
6.350	1/4	8.0	158.0	118.0	36.0	6592 6.350
6.400		8.0	158.0	118.0	36.0	6592 6.400
6.500		8.0	158.0	118.0	36.0	6592 6.500
6.530		8.0	158.0	118.0	36.0	6592 6.530
6.600		8.0	158.0	118.0	36.0	6592 6.600
6.700		8.0	158.0	118.0	36.0	6592 6.700
6.750	17/64	8.0	158.0	118.0	36.0	6592 6.750
6.800		8.0	158.0	118.0	36.0	6592 6.800
6.900		8.0	158.0	118.0	36.0	6592 6.900
7.000		8.0	158.0	118.0	36.0	6592 7.000
7.100		8.0	158.0	118.0	36.0	6592 7.100
7.140	9/32	8.0	158.0	118.0	36.0	6592 7.140
7.200		8.0	158.0	118.0	36.0	6592 7.200
7.300		8.0	158.0	118.0	36.0	6592 7.300
7.400		8.0	158.0	118.0	36.0	6592 7.400
7.500		8.0	158.0	118.0	36.0	6592 7.500
7.540	19/64	8.0	158.0	118.0	36.0	6592 7.540
7.600		8.0	158.0	118.0	36.0	6592 7.600
7.700		8.0	158.0	118.0	36.0	6592 7.700
7.800		8.0	158.0	118.0	36.0	6592 7.800
7.900		8.0	158.0	118.0	36.0	6592 7.900
7.940	5/16	8.0	158.0	118.0	36.0	6592 7.940
8.000		8.0	158.0	118.0	36.0	6592 8.000
8.100		10.0	190.0	146.0	40.0	6592 8.100
8.200		10.0	190.0	146.0	40.0	6592 8.200
8.300		10.0	190.0	146.0	40.0	6592 8.300
8.330	21/64	10.0	190.0	146.0	40.0	6592 8.330
8.400		10.0	190.0	146.0	40.0	6592 8.400
8.500		10.0	190.0	146.0	40.0	6592 8.500
8.600		10.0	190.0	146.0	40.0	6592 8.600
8.700		10.0	190.0	146.0	40.0	6592 8.700
8.730	11/32	10.0	190.0	146.0	40.0	6592 8.730
8.800		10.0	190.0	146.0	40.0	6592 8.800
8.900		10.0	190.0	146.0	40.0	6592 8.900

Article no.

6592

d1 mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	Order no.
9.000		10.0	190.0	146.0	40.0	6592 9.000
9.100		10.0	190.0	146.0	40.0	6592 9.100
9.130	23/64	10.0	190.0	146.0	40.0	6592 9.130
9.200		10.0	190.0	146.0	40.0	6592 9.200
9.300		10.0	190.0	146.0	40.0	6592 9.300
9.340		10.0	190.0	146.0	40.0	6592 9.340
9.400		10.0	190.0	146.0	40.0	6592 9.400
9.500		10.0	190.0	146.0	40.0	6592 9.500
9.520	3/8	10.0	190.0	146.0	40.0	6592 9.520
9.600		10.0	190.0	146.0	40.0	6592 9.600
9.700		10.0	190.0	146.0	40.0	6592 9.700
9.800		10.0	190.0	146.0	40.0	6592 9.800
9.900		10.0	190.0	146.0	40.0	6592 9.900
9.920	25/64	10.0	190.0	146.0	40.0	6592 9.920
10.000		10.0	190.0	146.0	40.0	6592 10.000
10.100		12.0	223.0	174.0	45.0	6592 10.100
10.200		12.0	223.0	174.0	45.0	6592 10.200
10.300		12.0	223.0	174.0	45.0	6592 10.300
10.320	13/32	12.0	223.0	174.0	45.0	6592 10.320
10.400		12.0	223.0	174.0	45.0	6592 10.400
10.500		12.0	223.0	174.0	45.0	6592 10.500
10.600		12.0	223.0	174.0	45.0	6592 10.600
10.700		12.0	223.0	174.0	45.0	6592 10.700
10.720	27/64	12.0	223.0	174.0	45.0	6592 10.720
10.800		12.0	223.0	174.0	45.0	6592 10.800
10.900		12.0	223.0	174.0	45.0	6592 10.900
11.000		12.0	223.0	174.0	45.0	6592 11.000
11.100		12.0	223.0	174.0	45.0	6592 11.100
11.110	7/16	12.0	223.0	174.0	45.0	6592 11.110
11.200		12.0	223.0	174.0	45.0	6592 11.200
11.300		12.0	223.0	174.0	45.0	6592 11.300
11.400		12.0	223.0	174.0	45.0	6592 11.400
11.500		12.0	223.0	174.0	45.0	6592 11.500
11.510	29/64	12.0	223.0	174.0	45.0	6592 11.510
11.600		12.0	223.0	174.0	45.0	6592 11.600
11.700		12.0	223.0	174.0	45.0	6592 11.700
11.800		12.0	223.0	174.0	45.0	6592 11.800
11.900		12.0	223.0	174.0	45.0	6592 11.900
11.910	15/32	12.0	223.0	174.0	45.0	6592 11.910
12.000		12.0	223.0	174.0	45.0	6592 12.000
12.300	31/64	14.0	251.0	202.0	45.0	6592 12.300
12.500		14.0	251.0	202.0	45.0	6592 12.500
12.700	1/2	14.0	251.0	202.0	45.0	6592 12.700
13.000		14.0	251.0	202.0	45.0	6592 13.000
13.100	33/64	14.0	251.0	202.0	45.0	6592 13.100
13.490	17/32	14.0	251.0	202.0	45.0	6592 13.490
13.500		14.0	251.0	202.0	45.0	6592 13.500
13.890	35/64	14.0	251.0	202.0	45.0	6592 13.890
14.000		14.0	251.0	202.0	45.0	6592 14.000
14.290	9/16	16.0	282.0	230.0	48.0	6592 14.290
14.500		16.0	282.0	230.0	48.0	6592 14.500
14.680	37/64	16.0	282.0	230.0	48.0	6592 14.680
15.000		16.0	282.0	230.0	48.0	6592 15.000
15.080	19/32	16.0	282.0	230.0	48.0	6592 15.080
15.480	39/64	16.0	282.0	230.0	48.0	6592 15.480
15.500		16.0	282.0	230.0	48.0	6592 15.500
15.870	5/8	16.0	282.0	230.0	48.0	6592 15.870
16.000		16.0	282.0	230.0	48.0	6592 16.000



Ratio drills with coolant ducts, 3-fluted, FT200U, 3xD and 5xD



Cutting data

Machining group		f (mm/rev) with nom. Ø								
										
	v _c (m/min)	4	6	8	10	12	14	16	18	20
P1.1.1 Unalloyed steel, annealed. 0.15 % C. Rm 420 N/mm ² . 125 HB	180	0,300	0,410	0,510	0,605	0,695	0,785	0,865	0,945	1,025
P1.1.2 Unalloyed steel, heat-treated. 0.15 % C. Rm 420 N/mm ² . 125 HB	160	0,270	0,370	0,460	0,545	0,625	0,705	0,780	0,855	0,925
P1.1.3 Unalloyed steel, annealed. 0.45 % C. Rm 640 N/mm ² . 190 HB	160	0,270	0,370	0,460	0,545	0,625	0,705	0,780	0,855	0,925
P1.1.4 Unalloyed steel, heat-treated. 0.45 % C. Rm 640 N/mm ² . 190 HB	155	0,255	0,350	0,435	0,515	0,590	0,665	0,735	0,805	0,870
P1.1.5 Unalloyed steel, heat-treated. 0.45 % C. Rm 850 N/mm ² . 250 HB	155	0,255	0,350	0,435	0,515	0,590	0,665	0,735	0,805	0,870
P1.1.6 Unalloyed steel, annealed. 0.75 % C. Rm 915 N/mm ² . 270 HB	145	0,240	0,330	0,410	0,485	0,555	0,625	0,695	0,760	0,820
P1.1.7 Unalloyed steel, heat-treated. 0.75 % C. Rm 1020 N/mm ² . 300 HB	135	0,225	0,310	0,385	0,455	0,520	0,585	0,650	0,710	0,770
P2.1.1 Low-alloy steel, annealed. Rm 610 N/mm ² . 180 HB	130	0,300	0,410	0,510	0,605	0,695	0,785	0,865	0,945	1,025
P2.1.2 Low-alloy steel, heat-treated. Rm 930 N/mm ² . 275 HB	130	0,300	0,410	0,510	0,605	0,695	0,785	0,865	0,945	1,025
P2.1.3 Low-alloy steel, heat-treated. Rm 1020 N/mm ² . 300 HB	110	0,255	0,350	0,435	0,515	0,590	0,665	0,735	0,805	0,870
P2.1.4 Low-alloy steel, heat-treated. Rm 1190 N/mm ² . 350 HB	100	0,225	0,310	0,385	0,455	0,520	0,585	0,650	0,710	0,770
P3.1.1 High-alloy steel and tool steel, annealed. Rm 680 N/mm ² . 200 HB	90	0,190	0,260	0,325	0,385	0,440	0,495	0,550	0,600	0,650
P3.1.2 High-alloy steel and tool steel, hardened and tempered. Rm 1100 N/mm ² . 325 HB	75	0,165	0,220	0,275	0,325	0,375	0,420	0,465	0,510	0,555
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	60	0,095	0,130	0,160	0,190	0,220	0,250	0,275	0,300	0,325
M1.1.2 Stainless steel, ferritic/martensitic, annealed. Rm 680 N/mm ² . 200 HB	55	0,085	0,115	0,145	0,175	0,200	0,225	0,245	0,270	0,295
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated. Rm 810 N/mm ² . 240 HB	50	0,080	0,110	0,140	0,165	0,185	0,210	0,235	0,255	0,275
M2.1.1 Stainless steel, austenitic, quenched. 180 HB										
M2.2.1 Duplex steel, high-strength stainless steels										
K1.1.1 Grey cast iron, pearlitic/ferritic. 180 HB	130	0,300	0,410	0,510	0,605	0,695	0,785	0,865	0,945	1,025
K1.1.2 Grey cast iron, pearlitic/martensitic. 260 HB	110	0,255	0,350	0,435	0,515	0,590	0,665	0,735	0,805	0,870
K1.2.1 Cast iron with spheroidal graphite, ferritic. 160 HB	110	0,255	0,350	0,435	0,515	0,590	0,665	0,735	0,805	0,870
K1.2.2 Cast iron with spheroidal graphite, pearlitic. 250 HB	105	0,240	0,330	0,410	0,485	0,555	0,625	0,695	0,760	0,820
K1.3.1 Malleable cast iron, ferritic. 130 HB	105	0,240	0,330	0,410	0,485	0,555	0,625	0,695	0,760	0,820
K1.3.2 Malleable cast iron, pearlitic. 230 HB	90	0,210	0,290	0,360	0,425	0,485	0,550	0,605	0,665	0,720
K2.1.1 Vermicular graphite cast iron (GJV)	100	0,240	0,325	0,405	0,480	0,550	0,620	0,685	0,750	0,815
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)	75	0,180	0,245	0,305	0,360	0,415	0,465	0,515	0,565	0,610
N1.1.1 Wrought aluminium alloys, non-hardened. 60 HB	200	0,240	0,325	0,405	0,480	0,550	0,620	0,685	0,750	0,815
N1.1.2 Wrought aluminium alloys, hardened. 100 HB	200	0,240	0,325	0,405	0,480	0,550	0,620	0,685	0,750	0,815
N2.1.1 Aluminium casting alloys, non-hardened. ≤ 12 % Si. 75 HB	180	0,240	0,325	0,405	0,480	0,550	0,620	0,685	0,750	0,815
N2.1.2 Aluminium casting alloys, hardened. ≤ 12 % Si. 90 HB	180	0,240	0,325	0,405	0,480	0,550	0,620	0,685	0,750	0,815
N2.1.3 Aluminium casting alloys, non-hardened. > 12 % Si. 130 HB	155	0,205	0,275	0,345	0,410	0,470	0,525	0,585	0,640	0,690
N3.1.1 Copper and copper alloys: Free-machining alloy. Pb > 1 %										
N3.1.2 Copper and copper alloys: CuZn, CuSnZn										
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte										
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics										
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.										
N4.1.3 Non-metallic materials: Graphite										
S1.1.1 Heat-resistant alloys, Fe-based, annealed. 200 HB	40	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,240	0,260
S1.1.2 Heat-resistant alloys, Fe-based, hardened. 280 HB	30	0,060	0,085	0,105	0,120	0,140	0,160	0,175	0,190	0,205
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed. 250 HB	35	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,240	0,260
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened. 350 HB	20	0,055	0,075	0,090	0,105	0,125	0,140	0,155	0,165	0,180
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast. 320 HB	25	0,055	0,075	0,090	0,105	0,125	0,140	0,155	0,165	0,180
S2.1.1 Titanium alloys, pure titanium. Rm 400 N/mm ²	60	0,095	0,130	0,160	0,190	0,220	0,250	0,275	0,300	0,325
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened. Rm 1050 N/mm ²	45	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,240	0,260
H1.1.1 Hardened steel, hardened and tempered. < 55 HRC	35	0,060	0,080	0,100	0,120	0,140	0,155	0,175	0,190	0,205
H1.1.2 Hardened steel, hardened and tempered. < 60 HRC										
H1.1.3 Hardened steel, hardened and tempered. > 60 HRC										
H2.1.1 Chilled cast iron. 400 HB										
H2.1.2 Chilled cast iron, hardened and tempered. < 55 HRC										



Ratio drills with coolant ducts, 3-fluted, FT 200 U, 8xD



Machining group		f (mm/rev) with nom. Ø						
	v _c (m/min)	4	6	8	10	12	14	16
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	180	0.300	0.410	0.510	0.605	0.695	0.785	0.865
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	160	0.270	0.370	0.460	0.545	0.625	0.705	0.780
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	160	0.270	0.370	0.460	0.545	0.625	0.705	0.780
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	155	0.255	0.350	0.435	0.515	0.590	0.665	0.735
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	155	0.255	0.350	0.435	0.515	0.590	0.665	0.735
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	145	0.240	0.330	0.410	0.485	0.555	0.625	0.695
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	135	0.225	0.310	0.385	0.455	0.520	0.585	0.650
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	130	0.305	0.410	0.515	0.610	0.700	0.785	0.870
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	130	0.305	0.410	0.515	0.610	0.700	0.785	0.870
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	110	0.260	0.350	0.435	0.515	0.595	0.665	0.740
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	100	0.225	0.310	0.385	0.455	0.525	0.590	0.650
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	80	0.190	0.260	0.325	0.385	0.440	0.495	0.550
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	70	0.165	0.220	0.275	0.325	0.375	0.420	0.465
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	60	0.095	0.130	0.160	0.190	0.220	0.250	0.275
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	55	0.085	0.115	0.145	0.175	0.200	0.225	0.245
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	50	0.080	0.110	0.140	0.165	0.185	0.210	0.235
M2.1.1 Stainless steel, austenitic, quenched, 180 HB								
M2.2.1 Duplex steel, high-strength stainless steels								
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB	130	0.300	0.410	0.510	0.605	0.695	0.785	0.865
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB	110	0.255	0.350	0.435	0.515	0.590	0.665	0.735
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB	110	0.255	0.350	0.435	0.515	0.590	0.665	0.735
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB	105	0.240	0.330	0.410	0.485	0.555	0.625	0.695
K1.3.1 Malleable cast iron, ferritic, 130 HB	105	0.240	0.330	0.410	0.485	0.555	0.625	0.695
K1.3.2 Malleable cast iron, pearlitic, 230 HB	90	0.210	0.290	0.360	0.425	0.485	0.550	0.605
K2.1.1 Vermicular graphite cast iron (GJV)	90	0.240	0.325	0.405	0.480	0.550	0.620	0.685
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)	70	0.180	0.245	0.305	0.360	0.415	0.465	0.515
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	180	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	180	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	160	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	160	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	135	0.165	0.220	0.275	0.325	0.375	0.420	0.465
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %								
N3.1.2 Copper and copper alloys: CuZn, CuSnZn								
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte								
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics								
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.								
N4.1.3 Non-metallic materials: Graphite								
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	40	0.060	0.080	0.100	0.120	0.140	0.155	0.175
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	30	0.050	0.065	0.080	0.095	0.110	0.125	0.140
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	35	0.060	0.080	0.100	0.120	0.140	0.155	0.175
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	20	0.040	0.055	0.070	0.085	0.095	0.110	0.120
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	25	0.040	0.055	0.070	0.085	0.095	0.110	0.120
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	60	0.095	0.130	0.160	0.190	0.220	0.250	0.275
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	45	0.075	0.105	0.130	0.155	0.175	0.200	0.220
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC	35	0.050	0.065	0.080	0.095	0.110	0.125	0.135
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC								
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC								
H2.1.1 Chilled cast iron, 400 HB								
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC								

Cutting data



Ratio drills with coolant ducts, 3-fluted, FT 200 U, 12xD



Cutting data

Machining group		f (mm/rev) with nom. Ø						
								
	v _c (m/min)	4	6	8	10	12	14	16
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	160	0.300	0.410	0.510	0.605	0.695	0.785	0.865
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	145	0.270	0.370	0.460	0.545	0.625	0.705	0.780
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	145	0.270	0.370	0.460	0.545	0.625	0.705	0.780
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	135	0.255	0.350	0.435	0.515	0.590	0.665	0.735
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	135	0.255	0.350	0.435	0.515	0.590	0.665	0.735
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	130	0.240	0.330	0.410	0.485	0.555	0.625	0.695
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	120	0.225	0.310	0.385	0.455	0.520	0.585	0.650
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	110	0.300	0.410	0.510	0.605	0.695	0.785	0.865
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	110	0.300	0.410	0.510	0.605	0.695	0.785	0.865
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	95	0.255	0.350	0.435	0.515	0.590	0.665	0.735
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	85	0.225	0.310	0.385	0.455	0.520	0.585	0.650
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	80	0.190	0.260	0.325	0.385	0.440	0.495	0.550
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	70	0.165	0.220	0.275	0.325	0.375	0.420	0.465
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	60	0.095	0.130	0.160	0.190	0.220	0.250	0.275
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	55	0.085	0.115	0.145	0.175	0.200	0.225	0.245
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	50	0.080	0.110	0.140	0.165	0.185	0.210	0.235
M2.1.1 Stainless steel, austenitic, quenched, 180 HB								
M2.2.1 Duplex steel, high-strength stainless steels								
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB	120	0.300	0.410	0.510	0.605	0.695	0.785	0.865
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB	100	0.255	0.350	0.435	0.515	0.590	0.665	0.735
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB	100	0.255	0.350	0.435	0.515	0.590	0.665	0.735
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB	95	0.240	0.330	0.410	0.485	0.555	0.625	0.695
K1.3.1 Malleable cast iron, ferritic, 130 HB	95	0.240	0.330	0.410	0.485	0.555	0.625	0.695
K1.3.2 Malleable cast iron, pearlitic, 230 HB	85	0.210	0.290	0.360	0.425	0.485	0.550	0.605
K2.1.1 Vermicular graphite cast iron (GJV)	90	0.240	0.325	0.405	0.480	0.550	0.620	0.685
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)	70	0.180	0.245	0.305	0.360	0.415	0.465	0.515
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	100	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	100	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	90	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	90	0.190	0.260	0.325	0.385	0.440	0.495	0.550
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	75	0.165	0.220	0.275	0.325	0.375	0.420	0.465
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %								
N3.1.2 Copper and copper alloys: CuZn, CuSnZn								
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte								
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics								
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.								
N4.1.3 Non-metallic materials: Graphite								
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	40	0.060	0.080	0.100	0.120	0.140	0.155	0.175
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	30	0.050	0.065	0.080	0.095	0.110	0.125	0.140
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	35	0.060	0.080	0.100	0.120	0.140	0.155	0.175
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	20	0.040	0.055	0.070	0.085	0.095	0.110	0.120
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	25	0.040	0.055	0.070	0.085	0.095	0.110	0.120
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	60	0.095	0.130	0.160	0.190	0.220	0.250	0.275
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	45	0.075	0.105	0.130	0.155	0.175	0.200	0.220
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC	35	0.050	0.065	0.080	0.095	0.110	0.125	0.135
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC								
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC								
H2.1.1 Chilled cast iron, 400 HB								
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC								

Register now!



Gühring online shop

Tool shopping made easy


With just a few clicks, you can order tools exactly when you need them. Check tool availability online 24/7. Creating watch lists and shopping cart templates saves you work for recurring orders. You can also assign individual user roles to your employees. Furthermore, use our subscription function in the shop to automatically reorder tools. And with the retrieval function, you can manage your contracts yourself in the shop.

- check price and stock in real time
- own material numbers make ordering easier
- individual approval processes for your company
- conveniently download CAD data when purchasing

THREE-FLUTED FLAT DRILL

For efficient & high quality 180° holes

In addition to the **FT 200 U**, we also offer the **FB 200 U**, an equally powerful flat drill: the FB 200 U can be used on flat surfaces **without pre-drilling or feed reduction**.

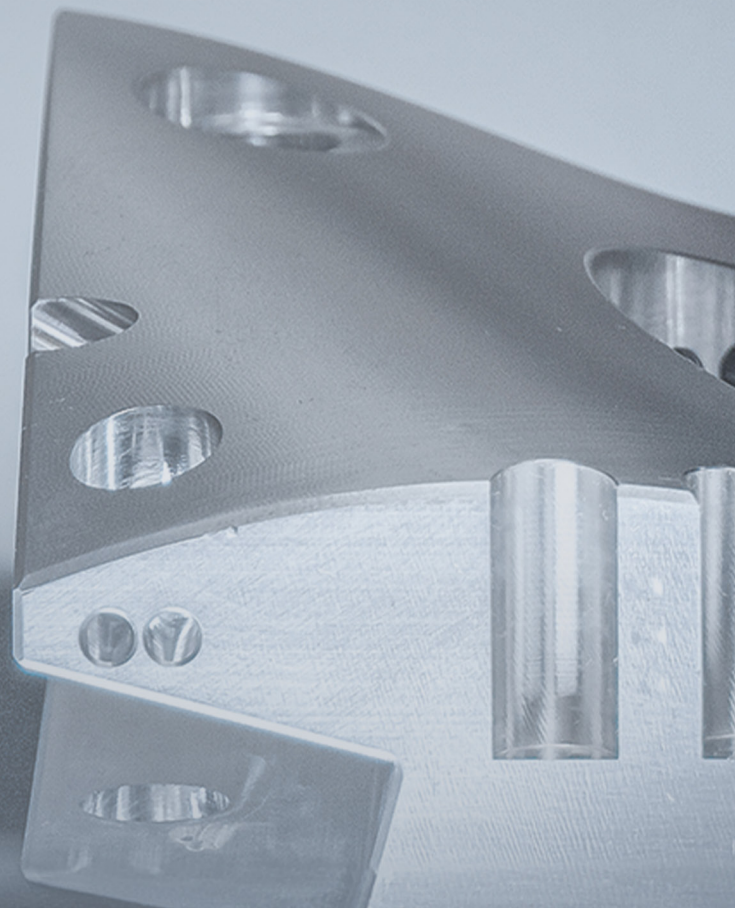

FB 200 U

NEW





FT 200 U solid carbide three-fluted cutter

201 598/25028-IX-23 | Printed in Germany | 2025

GÜHRING

Gühring KG | Herderstraße 50–54 | 72458 Albstadt | Germany
Phone: +49 74 31 17-0 | info@guehring.de | www.guehring.com

Any printing errors or changes that have occurred in the meantime do not justify any claims.
We deliver exclusively according to our terms of delivery and payment. You can request these from us.